

# BOLUS C62 and C65

## Permanent EID of cattle, sheep and goat

### Measures C62

Length: 66 mm  
Diameter: 19 mm  
Weight: 62 grams

### Measures C65

Length: 69 mm  
Diameter: 19 mm  
Weight: 65 grams

### Transponder

32 mm glass encapsulated HDX  
134,2 kHz or  
34 mm glass encapsulated FDX-B  
134,2 kHz glass transponders.  
compliant with ISO 11784 / 11785

### Cermics

Material: 95 wt. %AL<sub>2</sub>O<sub>3</sub>  
Fired density: min. 3.65 g/cm<sup>3</sup>  
Open porosity: 0 vol.%  
Bending strength: min. 250 MPa  
Compressing strength: 3000 MPa  
Surface: max 1,6 Ra

Tested and certified for safe use in ruminant animals according to EU regulations.

The OS ID Bolus C62 and C65 are rumen pellets that enables tamper proof electronic lifetime traceability of mature ruminant animals.

Several millions in use proving retention and reliability. These boluses combine superior retention with safe recovery in the slaughterhouse,

preventing any risk to the food chain. A RFID glass transponder is capsulated by high quality ceramic material and closed by a unique bolus plug.


Bolus C62



Bolus C65



Bolus applicator available for cattle and small ruminants (sheep and goats)

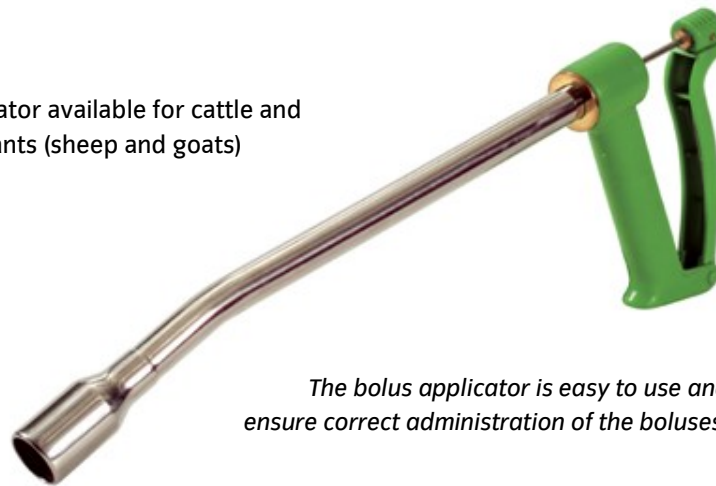

*The bolus applicator is easy to use and ensure correct administration of the boluses.*

